


CBB22 Metallized Polypropylene Film Capacitors

- Features: Small size, light weight, high insulation resistance, good self healing.
- Uses: Suitable for high current circuits and widely used in DC pulse sating, hi frequency and high current circuits.
- In electronic lighting ballast and high voltage power, supplies of high frequency and high pulse rise time circuits.
- According to user's need, capacitor of non standard and special specification can be produced.

Technical Specifications

Items	Characteristics
Standard	GB 10190 (IEC 384-16)
Climatic	55/085/21
Rated voltage	250,400,630V
	0.01-2.2 uF
Capacitance Range	
Capacitance Tolerance	±5%(J) ; ± 10% (K)
Voltage Proof	2.0U _R (1-5s)
Insulation Resistance	≥25000M Ω, C _R ≤ 0.33uF (20°C, 1min) ≥7500M Ω, C _R ≤ 0.33uF
Dissipation Factor	≤0.001 (1KHz) ≤0.002 (1KHz)

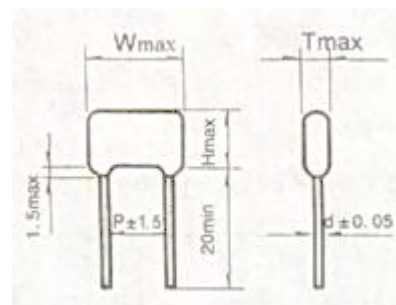

Dimension (mm)

[illegible]